

**SAFMOLD**

Release Agent

**DESCRIPTION**

**SAFMOLD** is a high performance release agent, "synthetic" quality for concrete. Ready to use, **SAFMOLD** provides easy stripping of all types of concrete after hardening.

**APPLICATIONS**

**SAFMOLD** can be used inside and outside, such as on-site factory prefabrication. Easily sprayable, it is applied in regular film by spray, brush or brush, depending on the nature of the mold.

**SAFMOLD** is for non-steamed and steamed concrete up to 80 ° C.

**SAFMOLD** can be used on metal substrates, plastic or wood. For special materials, it is recommended to perform a compatibility test beforehand.

**ADVANTAGES**

- Easily sprayable.
- Gives excellent results in both immediate release and delayed release.
- Provides an excellent surface appearance without bubbling or stain, ready to receive subsequent coatings.


**TECHNICAL INFORMATION**

NAME	UNITS	METHOD	SAFMOLD
Color	-	Visual	Yellow
Density at 20°C (68°F)	-	ISO 12185	0.836
Viscosity at 40°C (104°F)	mm <sup>2</sup> /s	ASTM D445	8.1
Viscosity at 100°C (212°F)	mm <sup>2</sup> /s	ASTM D445	2.3
Viscosity Index	-	ASTM D2270	98.0
Flash point	°C	ASTM D92	>100
Pour point	°C	ASTM D97	-42.0
Storage	-		frost-free, stable between 4 °C and 40 °C

These characteristics are given only for information and can be updated over time.

**HEALTH & SAFETY**

- Flash point >100°C
- No labeling
- No VOC (volatile organic compound)
- Aromatic content <1%

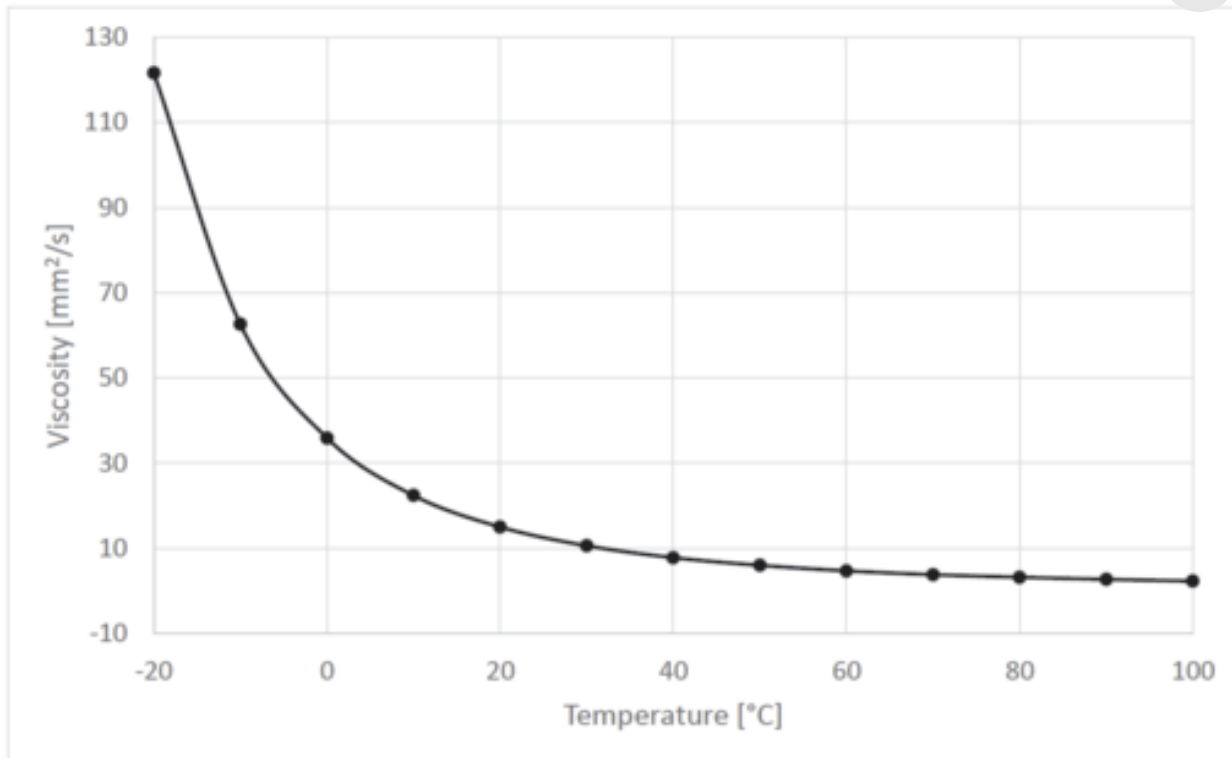

## INSTRUCTIONS

- 1 L covers from 15 to 30m<sup>2</sup> (wood) and from 30 to 40m<sup>2</sup> (metal or plastic).
- **SAFMOLD** has an expiry date of 24 months.
- It is recommended to store **SAFMOLD** frost-free. It is stable between 4°C and 40°C.

## SERVICES AND EQUIPMENT

In addition to its product ranges, MotulTech can provide tools and services for the maintenance and monitoring of your lubricants. Please contact your technical sales representative for more information.