

MOTULTECH SAFKOOL 6110 CS

SEMI SYNTHETIC FLUID FOR CUTTING AND GRINDING

SEMI-SYNTHETIC BASE

DESCRIPTION**SAFKOOL 6110 CS** is a water emulsifiable metalworking fluid concentrate.Thanks to its formulation **SAFKOOL 6110 CS** maximizes the cooling power and minimize the fluid consumption per carry-out.**APPLICATIONS****SAFKOOL 6110 CS** is a semi-synthetic fluid dedicated for grinding and general machining of cast iron and steel.**ADVANTAGES**

- Low foaming product.
- Very good cooling and detergency properties.
- Good separation of tramp oils.
- Very good particles settling properties.
- Excellent bio stability and stability in use.
- Operator friendly.
- Cleanliness of working environment.


TECHNICAL INFORMATION

TECHNICAL CHARACTERISTICS	UNITS	METHOD	SAFKOOL 6110 CS
Aspect	-		Liquid
Density	-		1,027.0
pH	-	NFT 60.193	9.7 at 5 %
Break Point Corrosion	%	IP 287	3
Refractometer Factor	-		2.5
Water Hardness range	ppm		100-400

These characteristics are given only for information and can be updated over time.



REFRACTOMETER CURVE

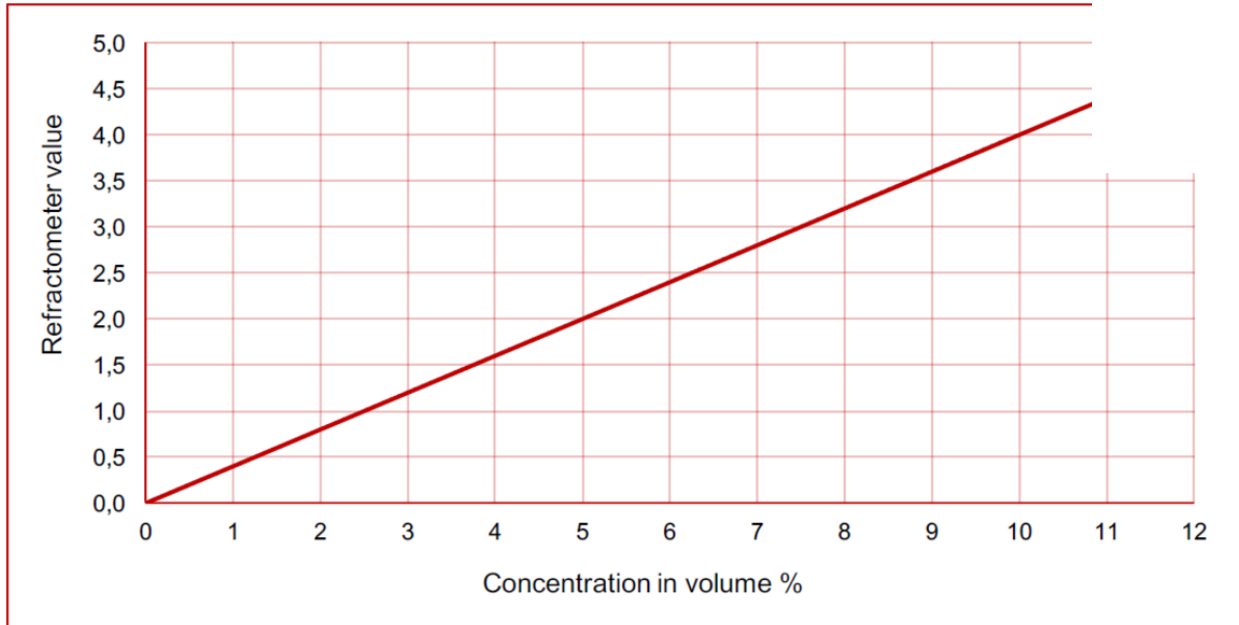

SERVICES AND EQUIPMENT

In addition to its product ranges, MotulTech can provide tools and services for the maintenance and monitoring of your lubricants. Please contact your technical sales representative for more information.